


END SUCTION METRIC MODEL FM 65-200 B

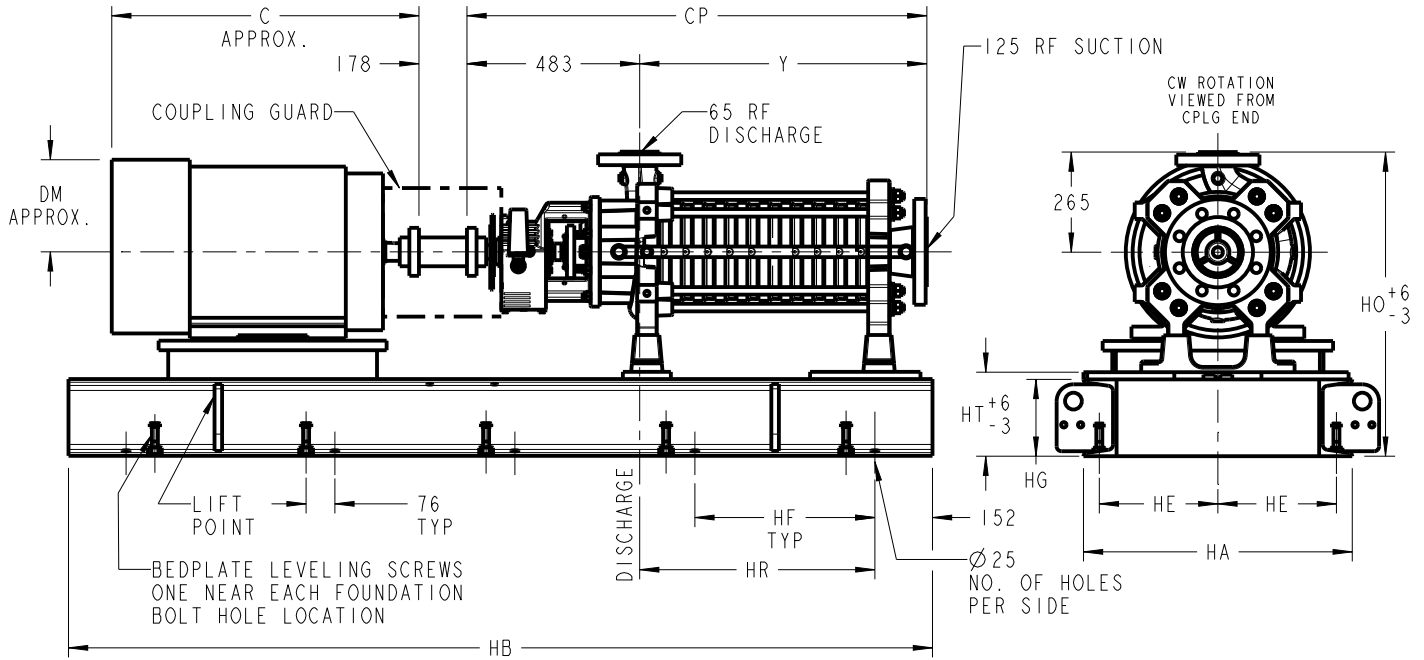

MOTOR DIMENSIONS (TEFC)						
MOTORS		C	DM	WT. INCL. CPLG.	BASE CODE	
NEMA	IEC					
254T	160M	610	168	123	1	
256T	160L	610	168	123		
284T	180M	686	189	184		
284TS	-	660	189	179		
286T	180L	686	189	184		
286TS	-	660	189	179		
324T	200M	762	216	263		
324TS	-	737	216	254		
326T	200L	762	216	263		
326TS	-	737	216	254		
364T	225S	864	244	379	2	
364TS	-	813	244	372		
365T	225M	864	244	379		
365TS	-	813	244	372		
404T	250S	991	271	526		
404TS	-	914	271	522		
405T	250M	991	271	526		
405TS	-	914	271	522		
444T	280S	1143	299	748		
444TS	-	1041	299	733		
445T	280M	1143	299	748	3	
445TS	-	1141	299	733		
447T	-	1219	299	1025		
447TS	-	1194	299	1025		
-	315L	1393	311	1157		4
-	355M	1490	355	1557		

PUMP DIMENSIONS						
NO OF STAGES	Y	CP	HR	WT	PUMP CODE	
2	247	729	419	222	A	
3	312	794		248	A	
4	377	859		274	A	
5	442	924		300	A	
6	507	989		326	A	
7	572	1054		351	A	
8	637	1119		377	B	
9	702	1184		403	B	
10	767	1249		432	B	
11	832	1314		456	B	
12	897	1379	870	481	C	
13	962	1444		507	C	
14	1027	1509		533	C	

BASEPLATE DIMENSIONS									
NO	HA	HB	HE	HF	HG	HO	HT	WT	NO. OF HOLES PER SIDE
1A	610	2032	267	576	152	760	178	281	4
2A	610	2032	267	576	152	760	178	294	4
3A	711	2286	318	495	203	811	229	462	5
2B	711	2540	318	559	203	811	229	440	5
3B	711	2540	318	559	203	811	229	473	5
2C	711	2794	318	622	203	811	229	457	5
3C	711	2794	318	622	203	811	229	505	5
4C	1030	3177	468	682	203	811	229	575	5


NOTE: 4C IS INFO ONLY, THE DIMENSION VARY WITH MOTOR DIMENSIONS

▲SEE BELOW FOR ACTUAL DISCHARGE NOZZLE POSITION PROVIDED

INSTALL FOUNDATION BOLTS IN PIPE SLEEVES. ALLOW 25.4mm TO 50.08mm FOR GROUTING. SEE INSTRUCTION BOOK FOR DETAILS.

AVAILABLE OPTIONS	
FLANGES (RAISED FACE):	
DISC:	<input type="checkbox"/> 600# (ANSI B16.5)
	<input type="checkbox"/> 900# (ANSI B16.5)
	<input type="checkbox"/> PN-63 (EN 1092-1)
	<input type="checkbox"/> PN-100 (EN 1092-1)
SUCT:	<input type="checkbox"/> 150# (ANSI B16.5)
	<input type="checkbox"/> 300# (ANSI B16.5)
	<input type="checkbox"/> PN-40 (EN 1092-1)

▲POSITION OF DISCHARGE NOZZLE (VIEWED FROM SHAFT END)

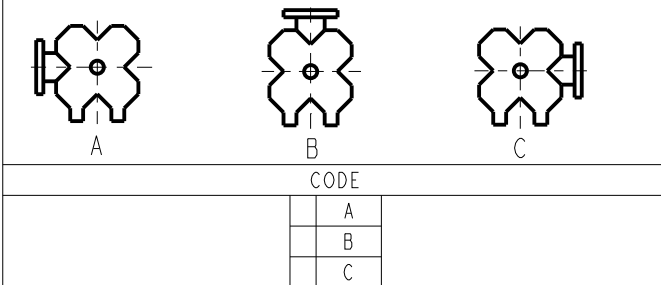

CERTIFIED FOR CONSTRUCTION PURPOSES ONLY WHEN SIGNED.

SIGNATURE

DATE

仅供报价参考使用

ISSUE

DRAWING IS NOT TO SCALE
DIMENSIONS IN MILLIMETERS
WEIGHTS(kg) ARE APPROXIMATE

DRAWN
REW
APPROVED
JCS

DRAWING

A10053A

REVISION

3

ISSUE

--

FORM NO.

